


June 14, 1927.

1,632,272

J. L. CENTLIVERE

MOVABLE FEATURE FIGURE TOY

Filed Feb. 19, 1926

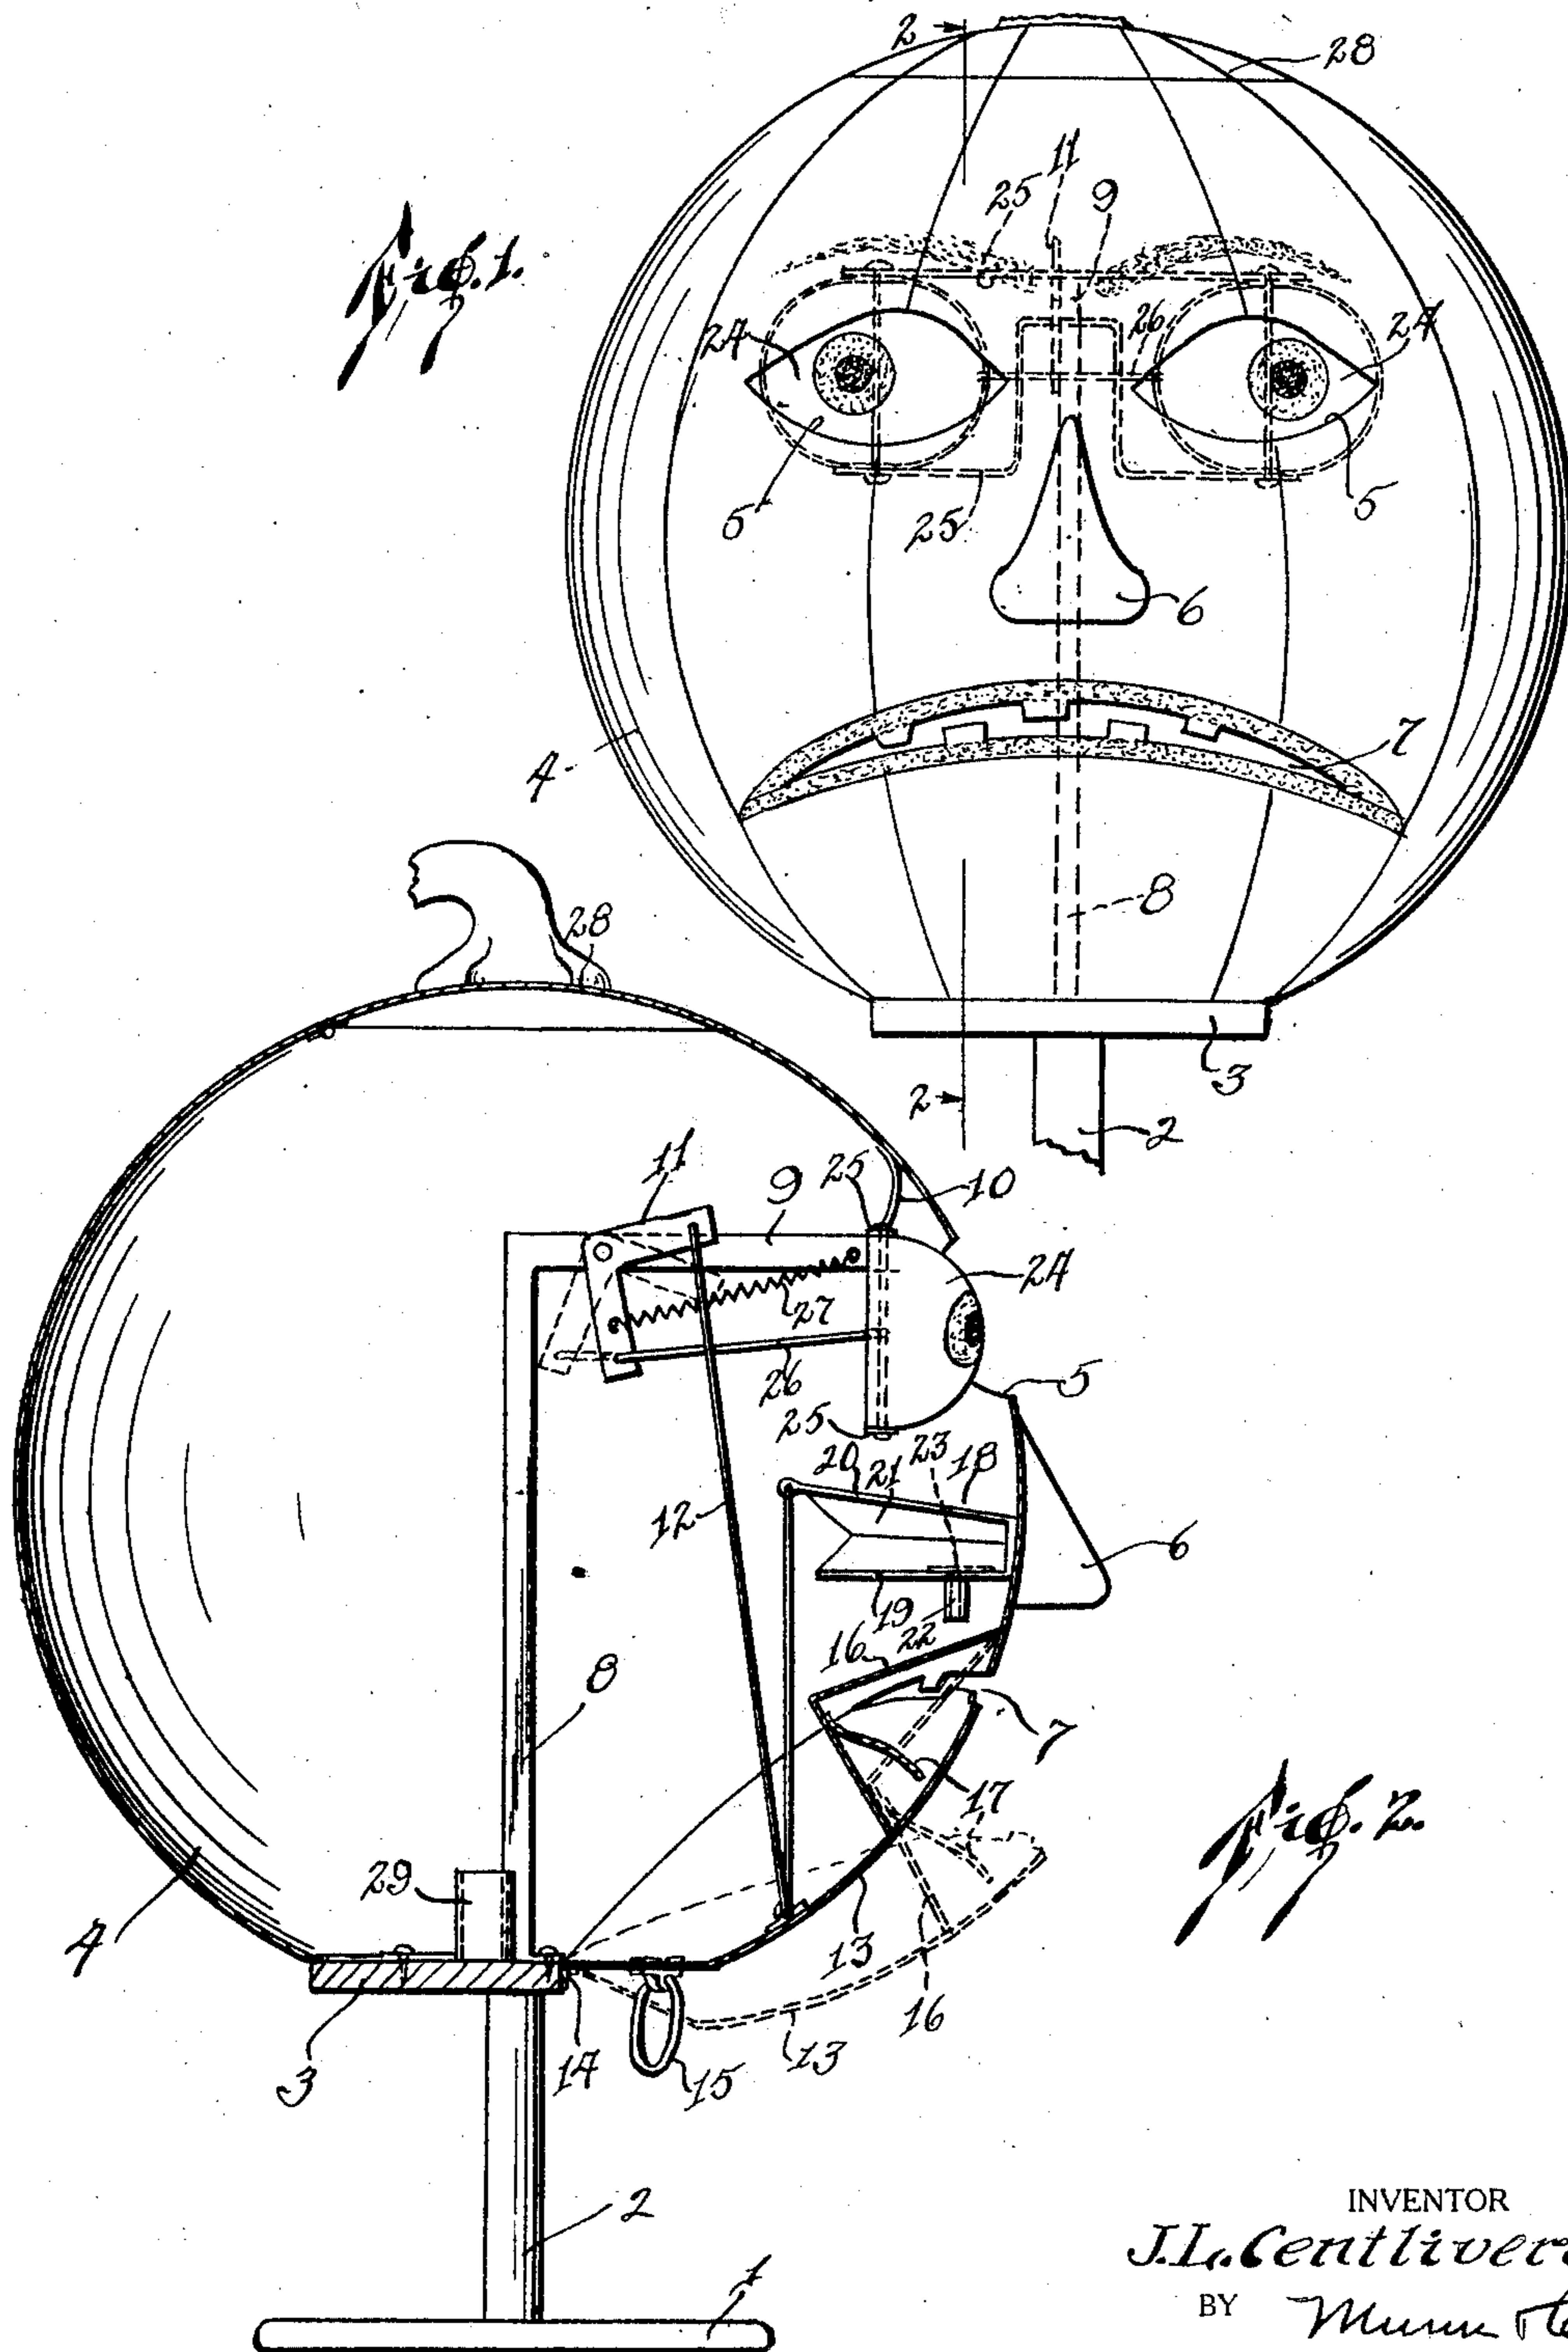

INVENTOR
J. L. Centlivere
BY *Mum & Co*
ATTORNEYS

UNITED STATES PATENT OFFICE.

JOHN L. CENTLIVERE, OF LARAMIE, WYOMING.

MOVABLE FEATURE FIGURE TOY.

Application filed February 19, 1926. Serial No. 89,386.

My invention relates to improvements in movable feature figure toys, and it consists in the combinations, constructions, and arrangements herein described and claimed.

5 An object of my invention is to provide a device of the jack o'lantern type which has movable parts, and novel means for moving the latter.

10 A further object of my invention is to provide a device of the type described which can be held in one hand and operated by the same hand.

15 A further object of my invention is to provide a device of the type described in which the holding mechanism is positioned away from the lighting means, whereby the user will not be in danger of being burnt.

20 Other objects and advantages will appear in the following specification, and the novel features of the invention will be particularly pointed out in the appended claims.

My invention is illustrated in the accompanying drawings forming part of this application, in which

25 Figure 1 is a front elevation of the device, and

Figure 2 is a section along the line 2—2 of Figure 1.

30 In carrying out my invention, I provide a base 1 having an integral standard 2. A block 3 is rigidly mounted upon the upper end of the standard 2 and carries a head 4. The head 4 is provided with eye openings 5, a nose 6, and a mouth 7. An L-shaped supporting rod 8 is rigidly mounted at its lower end to the block 3 and extends upwardly within the head 4. The outwardly turned portion 9 of the supporting rod 8 extends toward the front of the head 4 and is rigidly secured thereto by a strip 10. A bell crank lever 11 is secured at its fulcrum to the outwardly turned portion 9. A wire 12 is secured to the upper end of the bell crank lever 11, extends downwardly, and is pivotally secured to a jaw 13. The jaw 13 is hinged at 14 to the block 3 and extends upwardly forming the lower lip of the mouth 7.

45 A ring 15 is secured to the jaw 13 in the manner shown in Figure 2. An angular-shaped sheet 16 is secured to the inner wall of the head 4 and the jaw 13, and completely covers the inner portion of the mouth 7. The sheet 16 is provided with a tongue member 17, one end of which is rigidly

mounted upon the sheet, the other end of which extends upwardly a slight distance, as shown in Figure 2. A squawker 18 is rigidly mounted upon the inner wall of the head 4 above the sheet 16 and to one side 60 of the nose 6. The squawker 18 is provided with a fixed plate 19 and a movable plate 20 connected to each other by a flexible casing 21. The fixed plate 19 has an opening 22 over which is stretched a band 23. The 65 movable plate 20 is operatively connected to the jaw 13.

A pair of eyes 24 is positioned back of the openings 5 and within the head 4. The eyes 24 are pivotally secured to bars 25, 70 which in turn are rigidly secured to the outwardly turned portion 9 of the supporting rod 8. A wire 26 is pivotally secured to the inner wall of one of the eyes 24 and extends back and through the lower portion of the 75 bell crank lever 11. The free end of the wire 26 is then brought forward and pivotally secured to the innermost portion of the other eye 24. A tension spring 27 is connected at one end to the outwardly extending portion 9, and at the other end to the lower portion of the bell crank lever 11. The head 4 is provided with a cover 28 and a lamp or candle container 29.

80 From the foregoing description of the various parts of the device, the operation thereof may be readily understood. The cover 28 is first removed and a light, such as a candle, is placed within the container 29, and a cover again put in place. The device 90 may then be gripped by the standard 2, the operator extending one finger through the ring 15. Then by pulling downwardly upon the ring 15, the jaw 13 is pulled downwardly, opening the mouth 7 and the tongue 95 17 projects outwardly, see Figure 2. The upper portion of the bell crank lever 11 is pulled downwardly, thus pivoting the eyes 24 inwardly toward each other. At the same time, the movable plate 20 of the squawker 100 18 is moved downwardly, causing a peculiar squawking sound. By releasing the ring 15, the jaw 13, the eyes 24, and the plate 20 of the squawker will move into their normal position under the action of the spring 105 27. This operation can be repeated as often as desired. It will be observed that the base 1 can be placed upon a table, pedestal, or any desired support.

110 I have shown the head 4 in the shape of a

pumpkin, but it is obvious that the head can be of any desired shape, and be made of any suitable material.

I claim:

- 5 1. A device of the type described comprising a support, a head mounted upon said support, eye members mounted for move-
ment toward and away from each other in
said head, a movable jaw member, and
10 means operatively connecting said eye mem-
bers and said jaw member for simultane-
ously moving said eye members toward then
away from each other when said jaw mem-
ber is actuated.
- 15 2. A device of the type described compris-

ing a support, a head mounted upon said support, eye members mounted for move-
ment toward and away from each other in
said head, a squawker, a movable jaw mem-
ber, a movable mouth member secured to
20 the inner walls of said head and said jaw
member, means operatively connecting said
eye members and said jaw member for
opening said mouth member and moving
25 said eye members toward and away from
each other when said jaw member is actuat-
ed, and means operatively connecting said
squawker to said jaw member for actuating
said squawker when said jaw is actuated.

JOHN L. CENTLIVERE